

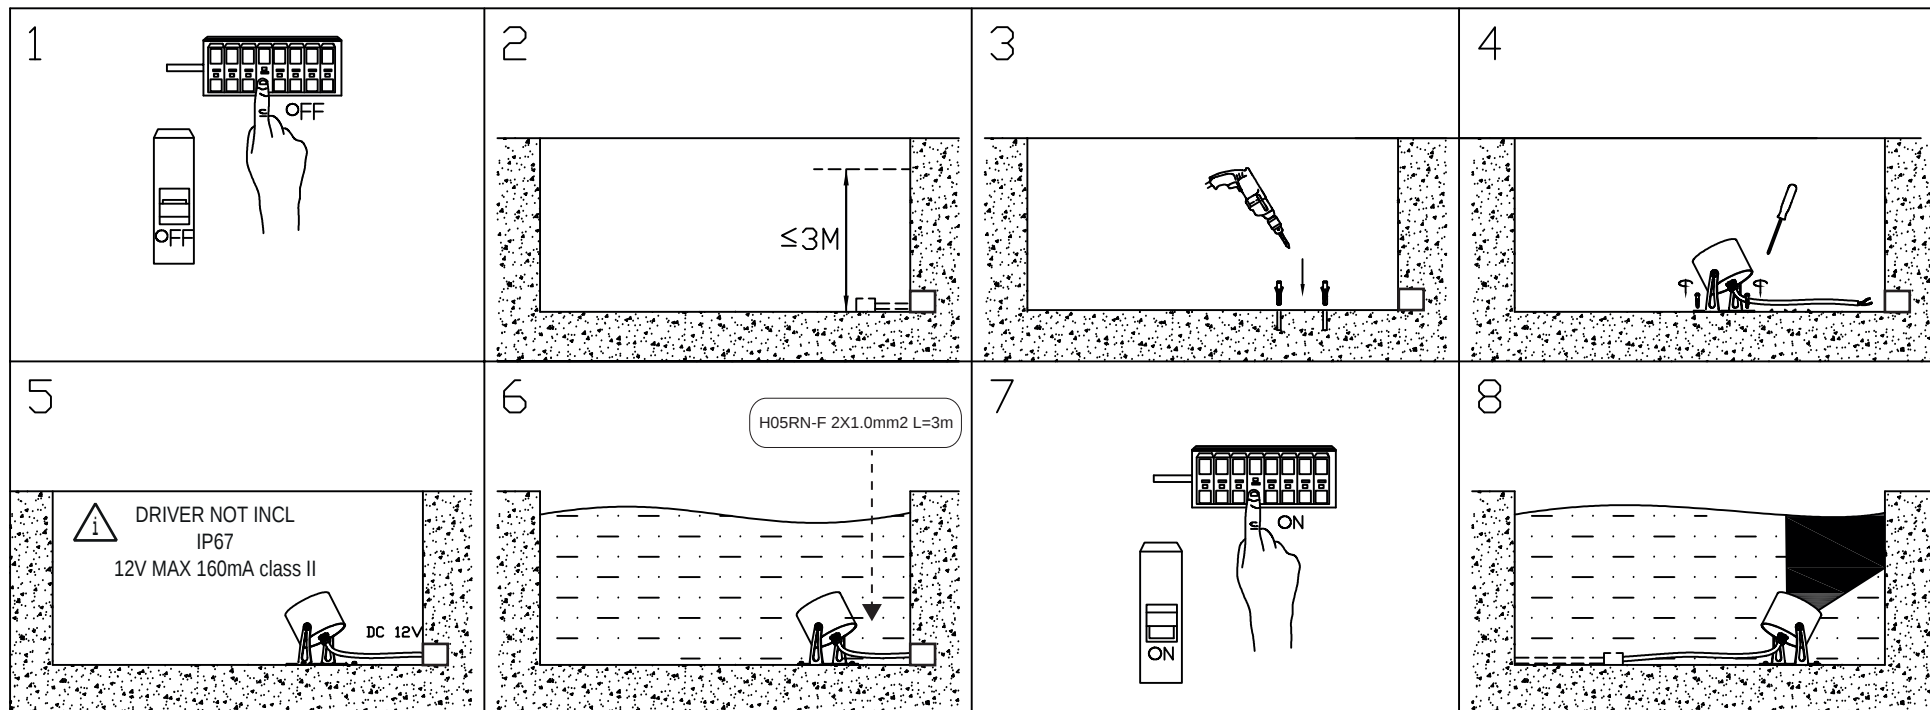


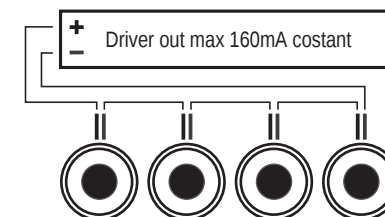

1- La instalación de la zona eléctrica o cuadro eléctrico para la instalación del convertidor debe realizarse a una distancia mínima de 2m desde el borde de la fuente, siendo accesible este cuadró o zona eléctrica solo mediante el uso de alguna herramienta.
2- CAJA DE CONEXIÓN CON MIN IP68 - NO INCLUIDA. La instalación puede requerir la intervención de una persona cualificada.
El bloque de conexión a incluir debe ser conforme con la EN 60998-2-1 o EN 60998-2-2. Bloque de conexión: MAX 10A,

1- The electrical zone or electrical panel installation must be made at minimum distance of 2m from the edge of the source. The electric zone must be accessible only by using a tool.
2- MIN IP68 WIRING CONNECTION BOX - NOT INCLUDED. The installation can need the intervention of a qualified person/qualified person. The block of connection must comply EN 60998-2-1 or EN 60998-2-2. The block of connection: MAX 10A

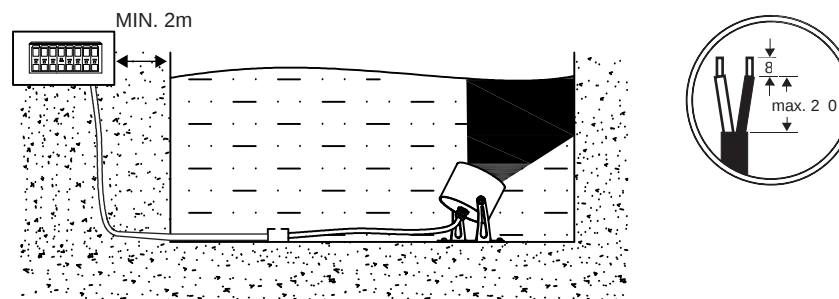

LIGHT SOURCE - FUENTE DE LUZ

SMD LED 6W 4000K 420lm INCL.

TECHNICAL FEATURES - CARACTERÍSTICAS TÉCNICAS

